

combomax 120-9

Date :

Project :

Location :

Engineer :

Contractor :



Combomax 120-9

Combined boiler and water heater

Design Specifications

The ComboMax 120-9 is an electric boiler designed to provide domestic hot water while integrating easily with any hydronic heating network. This unit can adequately meet any application requirement thanks to the wide range of voltage options available, for both single-phase and three-phase power supplies. Its easy-to-use electronic controller provides precise temperature and power control to minimize energy costs and to optimize the boiler's performance.



I – CONFIGURATION AN DESCRIPTION

The **Combomax 120-9** electric boiler is offered in SCR version only. The SCR version allows for proportional power modulation from 0 to 100% using a solid-state SCR relay, with other additional features.

1. CONTROLLER

The boiler will be operated by a Schneider Electric controller with the following features:

- A 3-inch LCD screen
- The controller is accurate, easily-configured and has a rear-lit display
- The controller's displays the unit's operating status and the following information at a glance:
 - Heat demand
 - Set point temperature
 - Outlet temperature
 - Outdoor temperature when the sensor is connected
 - Boiler power in real time
 - Number of stages and percentage of the capacity being used
 - Operating pressure
 - Operating mode: electric, auxiliary or dual-energy
 - "Boost" mode in operation
 - "Warm Weather Shut Down": The boiler shuts down when the outdoor temperature is high
 - Visual and audible alarm with alarm code
 - Operating status indicator lights: green, amber or red
 - Unit (°C/°F) and language (English/French) selector
 - Return temperature display
 - Boiler flow-rate display
 - Display of amperage measured at the boiler
 - Power consumption estimate display

2. TEMPERATURE ADJUSTMENT

- Adjustable set point temperature ranges from 50°F to 200°F (10°C to 93°C)
- There are different ways to control the set point temperature:
 1. Fixed set point temperature
 2. Water temperature modulation via the outdoor temperature sensor
 3. Remote water temperature control using an external BACnet IP or MSTP controller
 4. Variable water temperature based on a building occupancy schedule

THERMO 2000 INC



- The controller can be used to set a second, higher set point temperature, which allows you to use an indirect water heater with or without domestic hot water priority.
- “Boost” mode to automatically increase the temperature when demand persists
- Exterior temperature sensor included
- “Warm Weather Shut Down”: The boiler shuts down when the outdoor temperature is high
- External 0-10Vdc temperature control

3. POWER ADJUSTMENT

- The maximum power can be controlled as follows:
 1. The controller has no constraints or limitations
 2. The maximum power is controlled manually
 3. Maximum power modulated based on the sensor's outdoor temperature
 4. Remote power control (using an external BACnet IP or MSTP controller)
 5. Variable maximum power based on a pre-set schedule
- External 0-10Vdc power control

4. CONNECTIVITY

- Ethernet and BACnet network communication ports enable remote communication
- Standard BACnet IP or MSTP network communication
- Ability to view the operating status and to remotely modify the settings on a webpage
- Operating anomalies information and history
- Can be configured to send alarms by email

5. ELECTRIC CIRCUIT

SINGLE PHASE, 60HZ

- The electrical connection must be 2-wire cable with ground.

THREE-PHASE, 60HZ

- The electrical connection must be 3-wire cable with ground.
- Amperage measurement to detect anomalies and estimate power consumption

SINGLE PHASE, 60HZ & THREE-PHASE, 60HZ

- The heating elements will be square flange immersion type. They shall be low watt density and equipped with a copper sheath to ensure efficient heat transfer.
- The boiler will be equipped with two limit controls, the first will be adjustable with an automatic reset and the second will be at a fixed temperature with a manual reset.
- Control circuit ON/OFF switch
- Electrical control circuits will be equipped with fuses to protect the low-voltage circuits.
- Electrical circuits will be equipped with fuses to protect the high-voltage circuits.
- The unit's power can be modulated through a solid-state SCR relay from 0 to 100% based on the demand. In addition, it rotates through the stages to ensure components wear equally.
- A contact to activate an auxiliary boiler as a backup or in dual-energy mode
- Return temperature sensor
- An external contact lowers the heat demand when the building is unoccupied

THERMO 2000 INC



Peak-performance
heating systems

August 2026

II – IDENTIFICATION

COMBOMAX 120-9 (KW) (VOLTAGE) (X)PH

Example:

COMBOMAX 120-9 60 600-3PH

COMBOMAX 120-9 12 240 1PH

III - PRESSURE VESSEL

The tank shall be fabricated from steel in accordance with CSA B51-24 and shall bear a Canadian Registration Number (CRN) as well as an ASME “H” stamp, certifying that the tank is constructed in compliance with Section IV of the ASME Boiler and Pressure Vessel Code. The tank shall have a maximum operating pressure of 100 psi (689.5 kPa) and a water volume of 120 US gallons (454 liters). It shall be hydrostatically tested at 150 psi (1,034 kPa) in accordance with the ASME Code.

The unit shall be equipped with five (5) 2" NPT male connections allowing for multi-position installation and facilitating system connections. The tank shall include 12 openings for the installation of square-flange heating elements. It shall also be equipped with a ¾" ball-type drain valve and shall be shipped from the factory with an ASME-compliant safety relief valve with a 50 psi (345 kPa) trigger point. Refer to Section V for available safety relief valve options.

IV - CABINET

The outer steel jacket is coated with a baked enamel finish. The cabinet is designed to minimize floor space requirements while providing convenient access to internal components. The tank shall be insulated with polyurethane foam insulation, limiting heat loss to ½°F per hour. The lower compartment provides access to the heating elements and certain temperature sensors. The upper compartment provides access to the power and low-voltage control components. This upper compartment has a panel which holds the controller in place and can be removed to access only the low-voltage control components.

THERMO 2000 INC

500, 9th avenue, Richmond (Quebec) J0B 2H0
TEL.: 819-826-5613 FAX: 819-826-6370



Peak-performance
heating systems

August 2026

V - AVAILABLE OPTIONS

Addition of a Low Water Cut-Off Control

☐ ALTLWCO

30 psi Safety Relief Valve

☐ ALT3050

60 psi Safety Relief Valve

☐ ALT6050

Safety Relief Valve T&P 100 psi / 210 °F (Available on models 4,5kW to 30kW)

☐ ZMC200-SVTP100

Safety Relief Valve T&P 100 psi / 210 °F 40XL (Available on models 31kW to 60kW)

☐ ZMC200-SVTP10XL

VI - WARRANTY

The steel tank is covered by a 10-year limited warranty for closed-circuit heating applications. The optional coil is covered by a 10-year limited warranty. Parts and accessories have a 2-year warranty. The boiler must be tested, certified and bear the CSA Canada and US logos according to CSA C22.2 No. 165-92 and UL834 standards.

VII – START UP

To facilitate start-up, a pre-adjustment form is available in the event you would like to change the COMBOMAX 120-9 unit's default operating settings to values that correspond to your project's needs. Just indicate the values you need for your application and Thermo 2000 will program the controller in the factory.

Thermo 2000 Inc. reserves the right to modify, at any time without notice, the colours, components, materials, design specifications, or models that are described in this document.

THERMO 2000 INC

500, 9th avenue, Richmond (Quebec) J0B 2H0
TEL.: 819-826-5613 FAX: 819-826-6370


TECHNICAL DRAWING

COMBOMAX 120-9

THERMO 2000 inc.





Model	Tank Volume	Heat transfer area	Domestic water connection	Boiler connection	Equipment weight	Shipping weight
COMBOMAX® 120-9	120 gal. US	47.1 ft²	2" Sweat M	2" NPT M	630 lbs	705 lbs

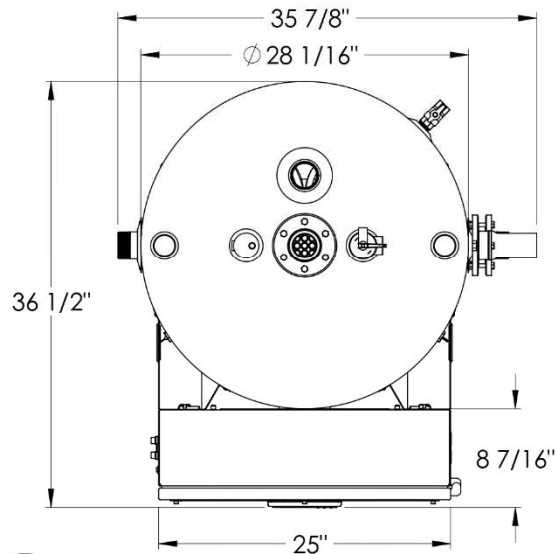

MAXIMUM PRESSURE : 100 PSI (HEATING), 100 PSI (DOMESTIC HOT WATER)

COMPONENTS IDENTIFICATION

- 1 Electrical main supply
- 2 Temp. & Press. indicator 1/2" NPTM
- 3 Access door power circuit
- 4 Pressure relief valve 3/4" NPTF
- 5 Automatic air vent 1/2" NPTM
- 6 Domestic hot water outlet
- 7 Cold water supply
- 8 Extra Tappings
- 9 Boiler Water Inlet
- 10 Tank drain valve 3/4"NPTF
- 11 Boiler Water Outlet
- 12 Adjustable legs
- 13 Electrical control wires access hole
- 14 Fuses for controls
- 15 Access door to heating elements
- 16 Boiler controller
- 17 "On/Off" switch

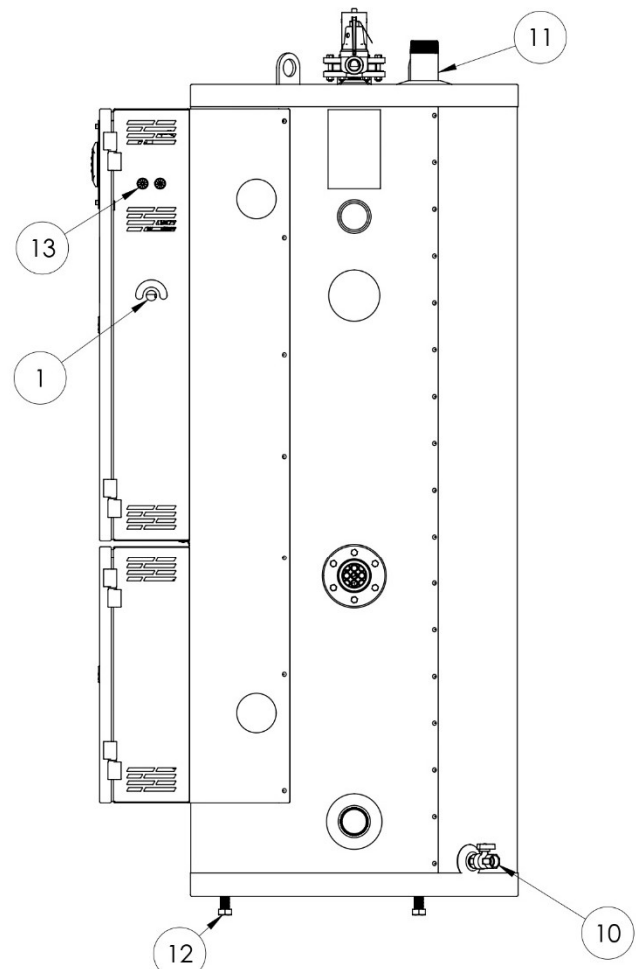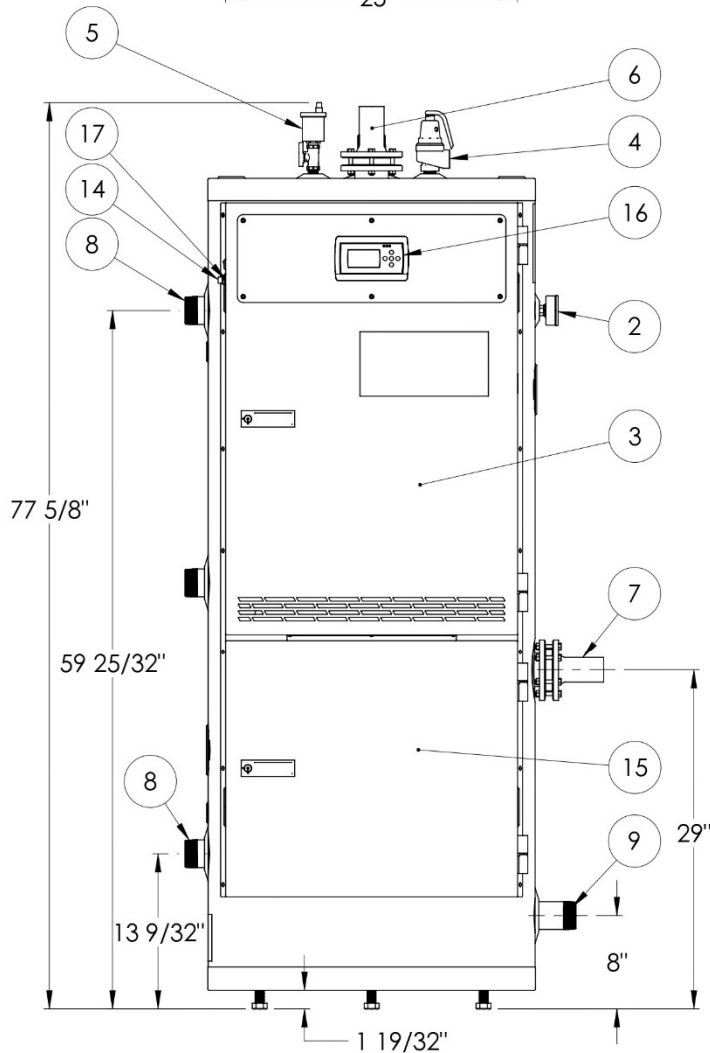

The dimensions provided are for reference only. Please contact Thermo2000 for certified dimensions.

COMBOMAX 120-9 600 VAC, 60Hz, 3 Phases¹

Model	BTU/h	kW	Amps	Stages	347V element	Relay Stages	SCR Stage	Supply lug size
ComboMax 120-9 9KW 600V 3PH	30708	9	8,7	1	3 x 3 kW	N.A.	1 x 9 kW	3 x 2/0 AWG
ComboMax 120-9 15KW 600V 3PH	51180	15	14,4	1	3 x 5 kW	N.A.	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 18KW 600V 3PH	61416	18	17,3	1	3 x 6 kW	N.A.	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 30KW 600V 3PH	102360	30	28,9	2	6 x 5 kW	1 x 15 kW	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 36KW 600V 3PH	122832	36	34,6	2	6 x 6 kW	1 x 18 kW	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 45KW 600V 3PH	153540	45	43,3	3	9 x 5 kW	2 x 15 kW	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 54KW 600V 3PH	184248	54	52	3	9 x 6 kW	2 x 18 kW	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 60KW 600V 3PH	204720	60	57,7	4	12 x 5 kW	3 x 15 kW	1 x 15 kW	3 x 2/0 AWG

¹ Electrical supply 600V 3 phase (L1-L2-L3) with 3 conductors Cu or AL, 75 °C with a ground.

COMBOMAX 120-9 480 VAC, 60Hz, 3 Phases¹

Model	BTU/h	kW	Amps	Stages	277V element	Relay Stages	SCR Stage	Supply lug size
ComboMax 120-9 9KW 480V 3PH	30708	9	10,8	1	3 x 3 kW	N.A.	1 x 9 kW	3 x 2/0 AWG
ComboMax 120-9 15KW 480V 3PH	51180	15	18,0	1	3 x 5 kW	N.A.	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 18KW 480V 3PH	61416	18	21,7	1	3 x 6 kW	N.A.	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 30KW 480V 3PH	102360	30	36,1	2	6 x 5 kW	1 x 15 kW	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 36KW 480V 3PH	122832	36	43,3	2	6 x 6 kW	1 x 18 kW	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 45KW 480V 3PH	153540	45	54,1	3	9 x 5 kW	2 x 15 kW	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 54KW 480V 3PH	184248	54	65	3	9 x 6 kW	2 x 18 kW	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 60KW 480V 3PH	204720	60	72,2	4	12 x 5 kW	3 x 15 kW	1 x 15 kW	3 x 2/0 AWG

¹ Electrical supply 480V 3 phase (L1 - L2 - L3) with 3 conductors Cu or AL, 75°C with a ground.

THERMO 2000 INC

500, 9th avenue, Richmond (Quebec) J0B 2H0
TEL.: 819-826-5613 FAX: 819-826-6370

COMBOMAX 120-9 240 VAC, 60Hz, 3 Phases¹								
Model	BTU/h	kW	Amps	Stages	240V element	Relay Stages	SCR Stage	Supply lug size
ComboMax 120-9 9KW 240V 3PH	30708	9	22	1	3 x 3 kW	N.A.	1 x 9 kW	3 x 2/0 AWG
ComboMax 120-9 13KW 240V 3PH	46062	13,5	32	1	3 x 4.5 kW	N.A.	1 x 13.5 kW	3 x 2/0 AWG
ComboMax 120-9 15KW 240V 3PH	51180	15	36	1	3 x 5 kW	N.A.	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 18KW 240V 3PH	61416	18	43	1	3 x 6 kW	N.A.	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 27KW 240V 3PH	92124	27	65	2	6 x 4.5 kW	1 x 13.5 kW	1 x 13.5 kW	3 x 2/0 AWG
ComboMax 120-9 30KW 240V 3PH	102360	30	72	2	6 x 5 kW	1 x 15 kW	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 36KW 240V 3PH	122832	36	87	2	6 x 6 kW	1 x 18 kW	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 41KW 240V 3PH	138186	40,5	97	3	9 x 4.5 kW	2 x 13.5 kW	1 x 13.5 kW	3 x 2/0 AWG
ComboMax 120-9 45KW 240V 3PH	153540	45	108	3	9 x 5 kW	2 x 15 kW	1 x 15 kW	3 x 2/0 AWG
ComboMax 120-9 54KW 240V 3PH	184248	54	130	3	9 x 6 kW	2 x 18 kW	1 x 18 kW	3 x 2/0 AWG
ComboMax 120-9 60KW 240V 3PH	204720	60	144	4	12 x 5 kW	3 x 15 kW	1 x 15 kW	3 x 2/0 AWG

¹ Electrical supply 240V 3 phase (L1-L2-L3) with 3 conductors Cu or AL, 75 °C with a ground.

COMBOMAX 120-9 208 VAC, 60Hz, 3 Phases¹								
Model	BTU/h	kW	Amps	Stages	240V ² element	Relay Stages	SCR Stage	Supply lug size
ComboMax 120-9 7KW 208V 3PH	23065	6,8	19	1	3 x 3 kW	N.A.	1 x 6.8 kW	3 x 2/0 AWG
ComboMax 120-9 10KW 208V 3PH	34598	10,1	28	1	3 x 4.5 kW	N.A.	1 x 10.1 kW	3 x 2/0 AWG
ComboMax 120-9 11KW 208V 3PH	38442	11,3	31	1	3 x 5 kW	N.A.	1 x 11.3 kW	3 x 2/0 AWG
ComboMax 120-9 14KW 208V 3PH	46130	13,5	37	1	3 x 6 kW	N.A.	1 x 13.5 kW	3 x 2/0 AWG
ComboMax 120-9 20KW 208V 3PH	69195	20,3	56	2	6 x 4.5 kW	1 x 10.1 kW	1 x 10.1 kW	3 x 2/0 AWG
ComboMax 120-9 23KW 208V 3PH	76884	22,5	62	2	6 x 5 kW	1 x 11.3 kW	1 x 11.3 kW	3 x 2/0 AWG
ComboMax 120-9 27KW 208V 3PH	92260	27,0	75	2	6 x 6 kW	1 x 13.5 kW	1 x 13.5 kW	3 x 2/0 AWG
ComboMax 120-9 30KW 208V 3PH	103793	30,4	84	3	9 x 4.5 kW	2 x 10.1 kW	1 x 10.1 kW	3 x 2/0 AWG
ComboMax 120-9 34KW 208V 3PH	115326	33,8	94	3	9 x 5 kW	2 x 11.3 kW	1 x 11.3 kW	3 x 2/0 AWG
ComboMax 120-9 41KW 208V 3PH	138391	40,6	113	3	9 x 6 kW	2 x 13.5 kW	1 x 13.5 kW	3 x 2/0 AWG
ComboMax 120-9 45KW 208V 3PH	153767	45,1	125	4	12 x 5 kW	3 x 11.3 kW	1 x 11.3 kW	3 x 2/0 AWG
ComboMax 120-9 54KW 208V 3PH	184521	54,1	150	4	12 x 6 kW	3 x 13.5 kW	1 x 13.5 kW	3 x 2/0 AWG

¹ Electrical supply 208V 3 phase (L1-L2-L3) with 3 conductors Cu or AL, 75 °C with a ground.

² 240V electrical element operated at 208V

THERMO 2000 INC

500, 9th avenue, Richmond (Quebec) J0B 2H0
TEL.: 819-826-5613 FAX: 819-826-6370

COMBOMAX 120-9 240 VAC, 60Hz, 1 Phase¹								
Model	BTU/h	kW	Amps	Stages	240V element	Relay Stages	SCR Stage	Supply lug size
ComboMax 120-9 6KW 240V 1PH	20472	6	25	1	1 x 6 kW	N.A.	1 x 6 kW	3 x 2/0 AWG
ComboMax 120-9 12KW 240V 1PH	40944	12	50	1	2 x 6 kW	N.A.	1 x 12 kW	3 x 2/0 AWG
ComboMax 120-9 18KW 240V 1PH	61416	18	75	2	4 x 4.5 kW	1 x 9 kW	1 x 9 kW	3 x 2/0 AWG
ComboMax 120-9 24KW 240V 1PH	81888	24	100	2	4 x 6 kW	1 x 12 kW	1 x 12 kW	3 x 2/0 AWG
ComboMax 120-9 30KW 240V 1PH	102360	30	125,0	3	6 x 5 kW	2 x 10 kW	1 x 10 kW	2 x 500 MCM
ComboMax 120-9 36KW 240V 1PH	122832	36	150,0	3	6 x 6 kW	2 x 12 kW	1 x 12 kW	2 x 500 MCM
ComboMax 120-9 42KW 240V 1PH	143304	42	175,0	4	4 x 4.5 kW 4 x 6 kW	3 x 10.5 kW	1 x 10.5 kW	2 x 500 MCM
ComboMax 120-9 48KW 240V 1PH	163776	48	200,0	4	8 x 6 kW	3 x 12 kW	1 x 12 kW	2 x 500 MCM
ComboMax 120-9 55KW 240V 1PH	187660	55	229,2	5	5 x 5 kW 5 x 6 kW	4 x 11 kW	1 x 11 kW	2 x 500 MCM
ComboMax 120-9 60KW 240V 1PH	204720	60	250	5	10 x 6 kW	4 x 12 kW	1 x 12 kW	2 x 500 MCM

¹ Electrical supply 240V 2 phase (L1-L2) with 2 conductors Cu or AL, 75 °C with a ground.

COMBOMAX 120-9 208 VAC, 60Hz, 1 Phase¹								
Model	BTU/h	kW	Amps	Stages	240V ² element	Relay Stages	SCR Stage	Supply lug size
ComboMax 120-9 5KW 208V 1PH	15377	4,5	22	1	1 x 6 kW	N.A.	1 x 4.5 kW	3 x 2/0 AWG
ComboMax 120-9 9KW 208V 1PH	30753	9	43	1	2 x 6 kW	N.A.	1 x 9 kW	3 x 2/0 AWG
ComboMax 120-9 13KW 208V 1PH	46130	13,5	65	2	4 x 4.5 kW	1 x 6.8 kW	1 x 6.8 kW	3 x 2/0 AWG
ComboMax 120-9 18KW 208V 1PH	61507	18	87	2	4 x 6 kW	1 x 9 kW	1 x 9 kW	3 x 2/0 AWG
ComboMax 120-9 23KW 208V 1PH	76884	22,5	108,2	3	6 x 5 kW	2 x 7.5 kW	1 x 7.5 kW	3 x 2/0 AWG
ComboMax 120-9 27KW 208V 1PH	92260	27	129,8	3	6 x 6 kW	2 x 9 kW	1 x 9 kW	3 x 2/0 AWG
ComboMax 120-9 32KW 208V 1PH	107637	31,5	151,4	4	4 x 4.5 kW 4 x 6 kW	3 x 7.9 kW	1 x 7.9 kW	2 x 500 MCM
ComboMax 120-9 36KW 208V 1PH	123014	36,1	173,6	4	8 x 6 kW	3 x 9 kW	1 x 9 kW	2 x 500 MCM
ComboMax 120-9 41KW 208V 1PH	140954	41,3	199	5	5 x 5 kW 5 x 6 kW	3 x 8.3 kW	1 x 8.3 kW	2 x 500 MCM
ComboMax 120-9 45KW 208V 1PH	153767	45,1	216,8	5	10 x 6 kW	3 x 9 kW	1 x 9 kW	2 x 500 MCM

¹ Electrical supply 240V 2 phase (L1-L2) with 2 conductors Cu or AL, 75 °C with a ground.

² 240 electrical element operated at 208V

THERMO 2000 INC

500, 9th avenue, Richmond (Quebec) J0B 2H0
TEL.: 819-826-5613 FAX: 819-826-6370