

FAN-COIL

100 000 to 120 000 BTU/H

The VTH Fan coil series guarantees you a comfortable and economic heating system. The VTH is compact, efficient and designed to be installed on a hydronic heating system in residential and commercial applications

Easy to install, the VTH can be connected with an electric, gas, oil or wood boiler.



Performance

Model	Heating capacity Maximum power (BTU)	Coil flow (US GPM)	Pressure loss (ft wc)	Fan Low speed (cfm)	High speed (cfm)	Static pressure (in wc)
VTH 4	100 000	8	4.5	1300	1600	0.4 to 0.9
VTH 6	120 000	13	4.9	1250	1450	0.45 to 1.0


Performance based on supply hot water to 180 ° F, and return air at 68 ° F

Technical Data

Model	Height (In)	Width (In)	Depth (In)	115 VAC Motor 1 phase (HP)	Water connection size for coil	Filter Dimensions (Inches)	Shipping Weight (lbs)
VTH 4	36	25	21	1/2	3/4 in.	20 X 20	135
VTH 6	36	25	21	1/2	1 in.	20 X 20	145

Return air duct: 19" x 19"
Air supply duct 20" x 23-3/4"


Standard Equipment

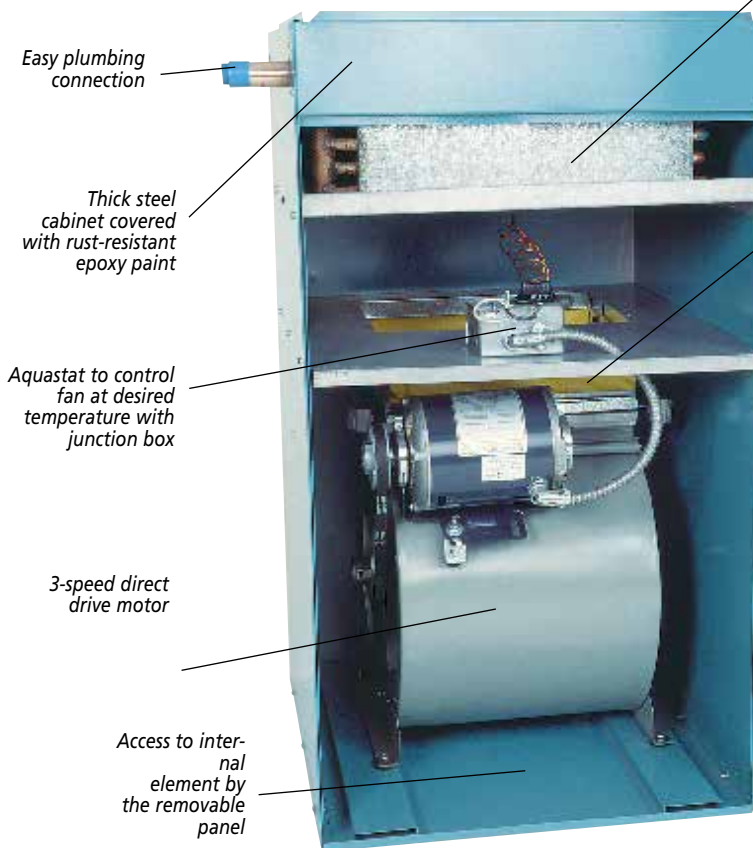

Multi-position installation

Comfortable heating
Efficient
Sustainable Design
Economical
Easy to install
Compact

10-year warranty on the radiator and 2 years on mechanical and electrical parts.
Consult terms of warranty.

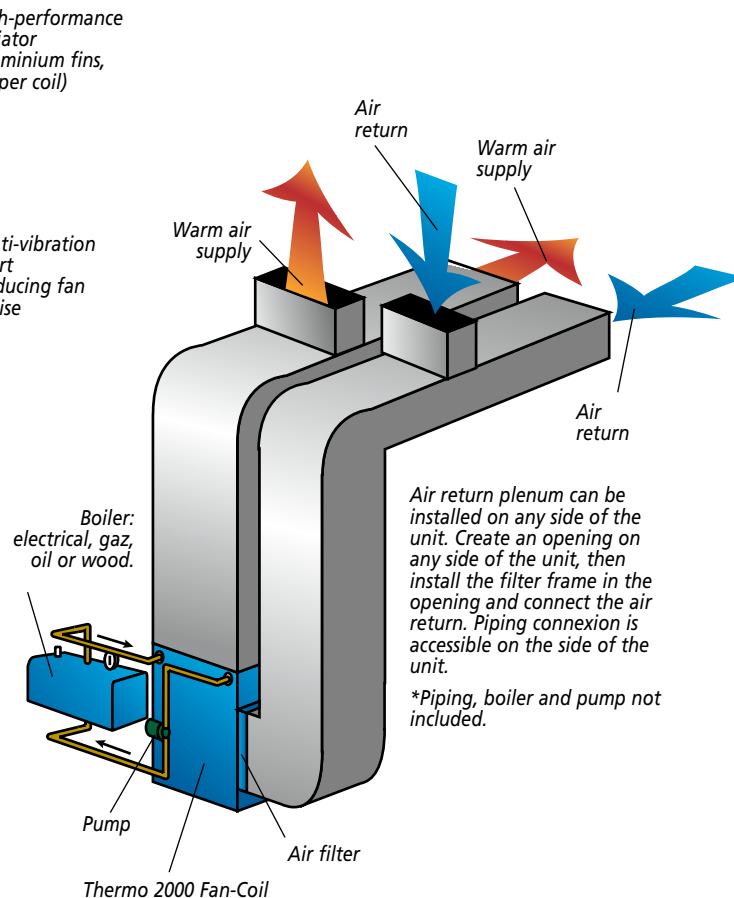

www.thermo2000.com

THERMO 2000 INC

500, 9^e avenue
Richmond (Québec) J0B 2H0
Tél.: 1-888-854-1111
(819) 826-5613
Fax: (819) 826-6370
E-mail: info@thermo2000.com